Individually mounted, lighted channel letters

Cut-away drawing

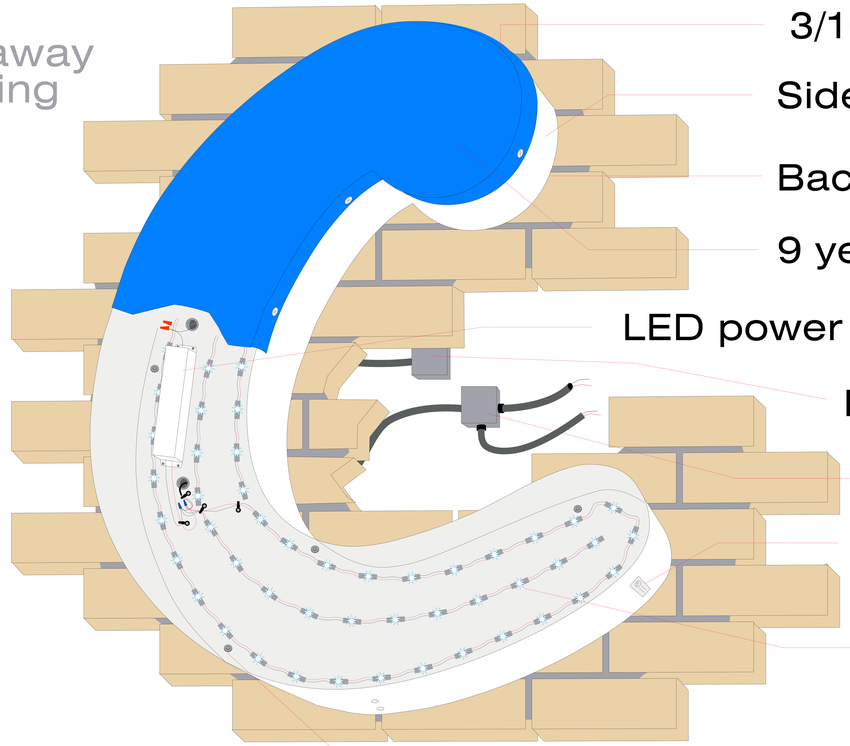

3/16" cast acrylic faces w/ Jewel-lite trim cap

Sides of letters (returns) .040 aluminum

Back of letter aluminum

9 year translucent vinyl graphics

LED power supply

Line to 120 volt power source

Line(s) to other letters sharing this same power supply

UL listed and must bear UL sectional label

LED lighting:
installed to factory specs for density and mounting methods

NOTE: All lines will be gathered into one transformer box inside attic for electrician to make connection - 120 volt, max 5 amps needed

Mounting methods:

Brick or block - 1/4" x 2" hammer drive anchors through letter backs into brick
Stucco covered foam - rust resistant deck screws long enough to reach through letter backs and foam into ply-wood if available / when no plywood is behind foam, plywood must be placed on inside of wall for screws to grab
Wood - rust resisant deck screws through letter backs into wood at least 1/2" thick

BrandRite SIGN COMPANY INC

Linford Oberholtzer
lin@brandritesign.com
803 533-7446
TF 888 771-7446 M 803 707-4512

FA

1.5"
weld
alum
cove
face