Mount Berry Mall sign drawings (directional sign panels & banners)

Directional sign panels

to be installed on existing signs

(3) 9 1/2" x 44 1/2" panels

(12) 7 1/2" x 44 1/2" panels

powder coated .090 aluminum (RAL 9003)
panels w/ 1" stand-off mounting
hardware:
- white background with reflective
red, white and black graphics
red - reflective Avery 7816R
black - reflective Avery 7818R
white - reflective Avery 7801R
(3) mall panels
(12) tenant panels

Printed banners

(3) 10'x6' digital printed heavy duty banners w/ webbing sown into each corner

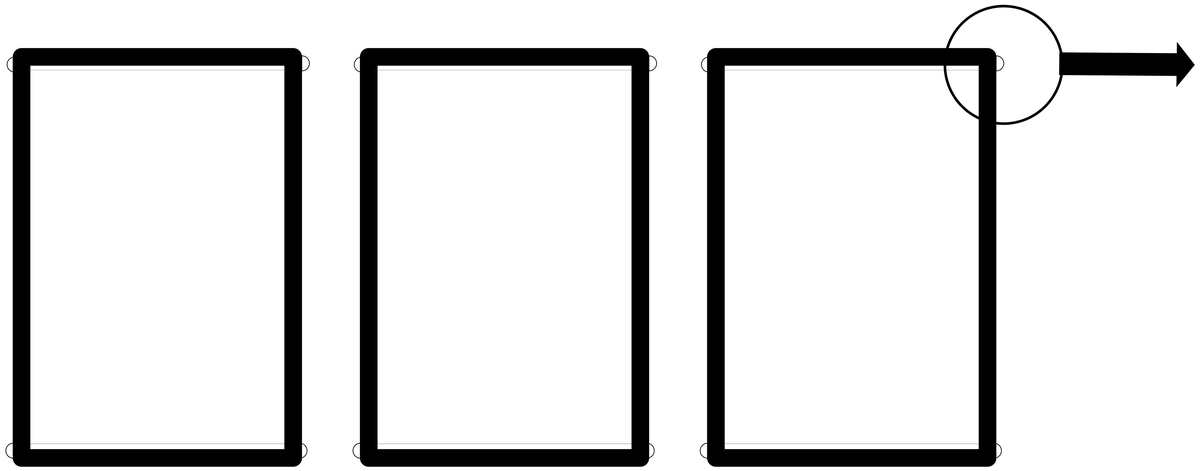

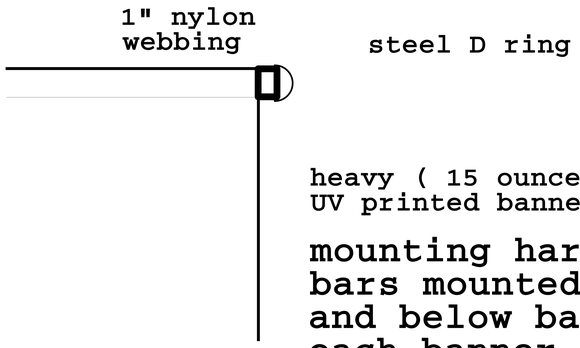

heavy (15 ounce)
UV printed banners

mounting hardware - fixed metal bars mounted horizontal above and below banners (2 bars for each banner)

Hull Properties / Gemni Construction

Mount Berry Mall
Roam GA.

BrandRite SIGN COMPANY INC.

803-533-7446
313 John C Calhoun Drive
Orangeburg SC 29115

Linford Oberholtzer
lin@brandritesign.com
Mobile 803-707-4512