Columbus GA Cook Out Sign Drawing Drawing date 3/5/19

A

COOKOUT

Front wall signs

Logo 4' x 25'

- Lighted channel letters / LED lighted (GE LEDs)/ UL listed electrical

A Front

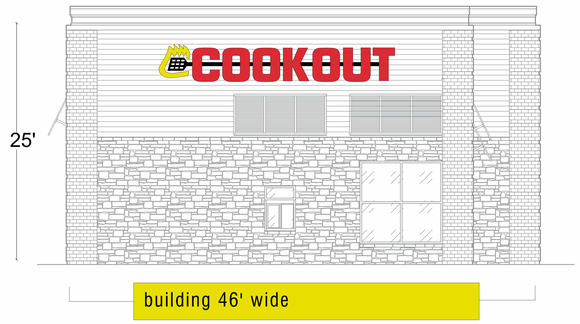

C Dining room entrance side

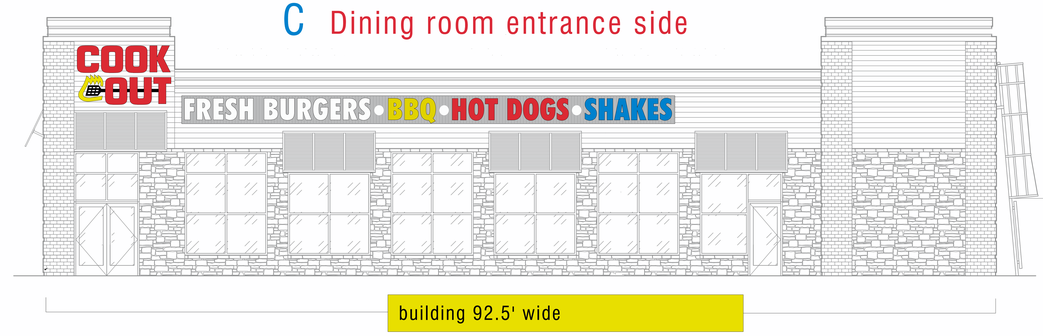

H

B

COOKOUT

Front wall signs

Logo 3' x 18'

- Lighted channel letters / LED lighted (GE LEDs)/ UL listed electrical

B Back

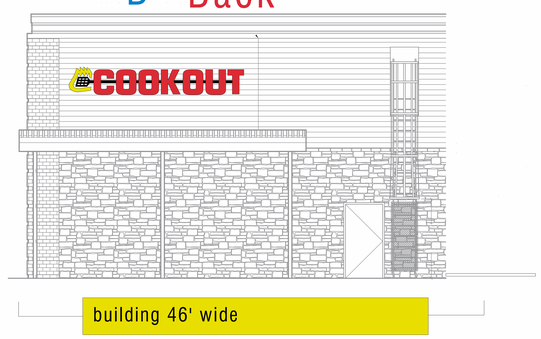

Scale - 1" = 4'

D Drive thru side

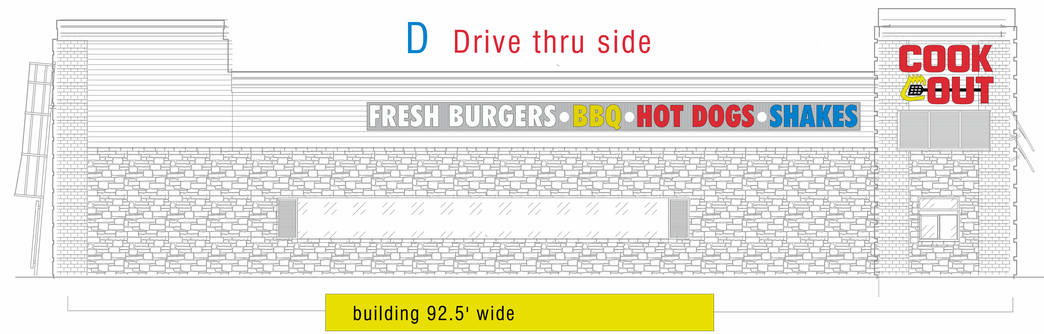

Scale - 1" = 4'

Scale - 1" = 4'

C & D

COOK OUT

FRESH BURGERS • BBQ • HOT DOGS • SHAKES

Left and Right side wall signs

6' x 10' Logo / 3' x 52' Tag Line

- Channel letters on a corrugated aluminum powder coated back-panel
- Lighted channel letters / LED lighted (GE LEDs)/ UL listed electrical

Scope of job:
Supply and install all of the below:

(1) building front wall logo sign
(1) building back wall logo sign
(2) building side wall logo signs and tag lines on each right and left wall
(1) free standing roadside sign
(3) menus (2) drive thru (1) dining room
(2) entrance signs
(2) drive thru directional signs
(500') of white border neon

E

(2) 6' x 6' drive up lighted menus

F

(2) 2.6' x 1.5'
(3' high when installed)
powder coated aluminum drive-way entrance signs

G

Also included but not pictured:

- (1) interior dining room lighted menu
- (2) 2'x2' powder coated aluminum drive thru directional signs w/ 2"x2"x10' powder coated aluminum posts
- (2) dining room lighted wall poster signs (1) for tray menu (1) for shakes
- (500') of white neon border (2 bands around top of building)

H

TOP SIGN
22' WIDE X7'6" HIGH
LED lighted channel letters on a powder coated aluminum panel / double sided / UL listed electrical

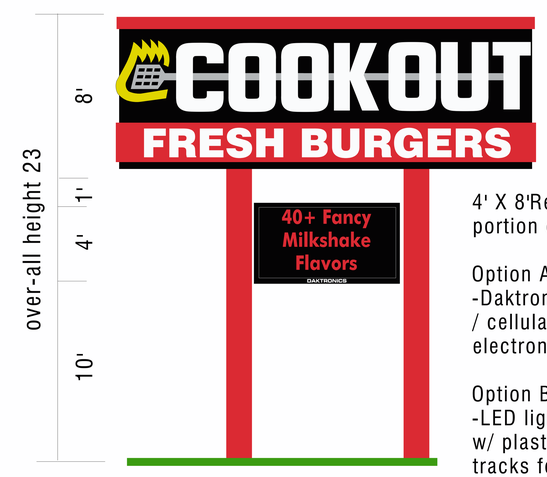

4' X 8'Reader board portion of sign

Option A
-Daktronics / red / 19 mm / cellular / controlled electronic message unit

Option B
-LED lighted cabinet w/ plastic faces and tracks for 8" Gemini letters / UL listed

Scale - 1" = 2'

BrandRite SIGN COMPANY INC.

803-533-7446
313 John C Calhoun Drive
Orangeburg SC 29115
Linford Oberholtzer
lin@brandritesign.com
Mobile 803-707-4512